

EMI countermeasure for ferrite cores

◎ Product introduction 產品介紹



- This product is a round cable topical products
圓形電纜的外用產品
- Various shapes and materials variety
各種形狀和材質品種豐富
- The number of windings can play a noise countermeasure effect
繞線圈數即可簡單發揮噪音對策效果
- For RoHS instructions corresponding products
為RoHS指令對應產品

◎ Product application 產品應用

- Imaging equipment、Audio equipment、Electrical equipment、Communication equipment
影像設備、音響設備、電裝設備、通信設備等

◎ Product Identification 產品標識

A2 T 25 * 12 * 15

A2-----Material code 材料代碼

T-----Product shape 產品形狀


25-----Outside diameter 產品外徑

12-----Height 高度

15-----Inner hole 內徑

EMI countermeasure for ferrite cores

◎Shape&Dimensions 形狀與尺寸:

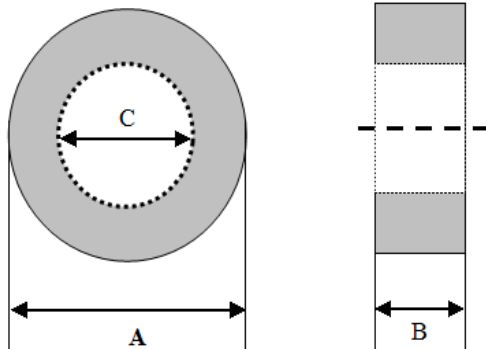

Test Instruments 測試儀器

TEST INSTRUMENTS	HP 4191A
LCR METER	HP 4286
WIRE	0.65T.C.W*100m/m 1/2Ts
TEMPERATURE	15°C to 35°C
HUMIDITY	25% to 85% RH

◎ Detailed specifications and parameters are introduced

詳細規格及參數介紹

UNIT: mm

NO	SIZE CODE	A	B	C	Impedance(Ω) MIN	
					25 MHz	100 MHz
1	T 2.5*1.3*1.3	2.5 $\pm$ 0.3	1.3 $\pm$ 0.3	1.3 $\pm$ 0.3	10	50
2	T 3*3*1.2	3.0 $\pm$ 0.3	3.0 $\pm$ 0.3	1.2 $\pm$ 0.3	20	65
3	T 3.5*2*1.8	3.5 $\pm$ 0.4	2.0 $\pm$ 0.4	1.8 $\pm$ 0.3	20	60
4	T 3.5*3*1.0	3.5 $\pm$ 0.4	3.0 $\pm$ 0.4	1.0 $\pm$ 0.3	30	75
5	T 3.5*3*0.8	3.5 $\pm$ 0.4	3.0 $\pm$ 0.4	0.8 $\pm$ 0.3	30	80
6	T 3.5*3*1.8	3.5 $\pm$ 0.4	3.0 $\pm$ 0.4	1.8 $\pm$ 0.3	20	65
7	T 3.5*3.2*1.6	3.5 $\pm$ 0.4	3.2 $\pm$ 0.4	1.6 $\pm$ 0.3	20	65
8	T 4*1*2	4.0 $\pm$ 0.4	1.0 $\pm$ 0.3	2.0 $\pm$ 0.3	15	60
9	T 4*2*2	4.0 $\pm$ 0.4	2.0 $\pm$ 0.4	2.0 $\pm$ 0.3	20	65
10	T 4*3*2	4.0 $\pm$ 0.4	3.0 $\pm$ 0.4	2.0 $\pm$ 0.3	20	65
11	T 4*4*1.5	4.0 $\pm$ 0.4	4.0 $\pm$ 0.4	1.5 $\pm$ 0.3	25	70
12	T 4*4*2	4.0 $\pm$ 0.4	4.0 $\pm$ 0.4	2.0 $\pm$ 0.3	20	70
13	T 5*2.5*3	5.0 $\pm$ 0.4	2.5 $\pm$ 0.4	3.0 $\pm$ 0.3	15	65
14	T 5*4*3	5.0 $\pm$ 0.4	4.0 $\pm$ 0.4	3.0 $\pm$ 0.3	20	65
15	T 5*5*3	5.0 $\pm$ 0.4	5.0 $\pm$ 0.4	3.0 $\pm$ 0.3	25	70

EMI countermeasure for ferrite cores

◎ Detailed specifications and parameters are introduced

詳細規格及參數介紹

UNIT: mm

NO	SIZE CODE	A	B	C	Impedance(Ω) MIN	
					25 MHz	100 MHz
16	T 6*2*3	6.0 $\pm$ 0.4	2.0 $\pm$ 0.4	3.0 $\pm$ 0.3	15	60
17	T 6*3*3	6.0 $\pm$ 0.4	3.0 $\pm$ 0.4	3.0 $\pm$ 0.3	20	65
18	T 6*3*4	6.0 $\pm$ 0.4	3.0 $\pm$ 0.4	4.0 $\pm$ 0.4	15	60
19	T 6*4*3	6.0 $\pm$ 0.4	4.0 $\pm$ 0.4	3.0 $\pm$ 0.3	25	70
20	T 6*4*4	6.0 $\pm$ 0.4	4.0 $\pm$ 0.4	4.0 $\pm$ 0.4	20	65
21	T 6*6*3	6.0 $\pm$ 0.4	6.0 $\pm$ 0.4	3.0 $\pm$ 0.3	25	75
22	T 6*6*4	6.0 $\pm$ 0.4	6.0 $\pm$ 0.4	4.0 $\pm$ 0.4	20	65
23	T 6.5*5*4	6.5 $\pm$ 0.4	5.0 $\pm$ 0.4	4.0 $\pm$ 0.4	20	70
24	T 6.5*5*4.3	6.5 $\pm$ 0.4	5.0 $\pm$ 0.4	4.3 $\pm$ 0.4	20	65
25	T 7*7*4	7.0 $\pm$ 0.4	7.0 $\pm$ 0.4	4.0 $\pm$ 0.4	25	80
26	T 7.6*2*5.3	7.6 $\pm$ 0.4	2.0 $\pm$ 0.4	5.3 $\pm$ 0.4	15	60
27	T 7.6*3.6*4.2	7.6 $\pm$ 0.4	3.6 $\pm$ 0.4	4.2 $\pm$ 0.4	20	70
28	T 7.6*5*5.2	7.6 $\pm$ 0.4	5.0 $\pm$ 0.4	5.2 $\pm$ 0.4	20	65
29	T 7.6*6*5	7.6 $\pm$ 0.4	6.0 $\pm$ 0.4	5.0 $\pm$ 0.4	20	70
30	T 8*2*4	8.0 $\pm$ 0.4	2.0 $\pm$ 0.4	4.0 $\pm$ 0.4	15	60
31	T 8*3*4	8.0 $\pm$ 0.4	3.0 $\pm$ 0.4	4.0 $\pm$ 0.4	20	65
32	T 8*4*4	8.0 $\pm$ 0.4	4.0 $\pm$ 0.4	4.0 $\pm$ 0.4	25	70
33	T 8*6.3*5.6	8.0 $\pm$ 0.4	6.3 $\pm$ 0.4	5.6 $\pm$ 0.4	20	70
34	T 8*7*6	8.0 $\pm$ 0.4	7.0 $\pm$ 0.4	6.0 $\pm$ 0.4	20	65
35	T 8*7.5*5.3	8.0 $\pm$ 0.4	7.5 $\pm$ 0.4	5.3 $\pm$ 0.4	20	75
36	T 8*8*4	8.0 $\pm$ 0.4	8.0 $\pm$ 0.4	4.0 $\pm$ 0.4	35	90
37	T 9*3*5	9.0 $\pm$ 0.4	3.0 $\pm$ 0.4	5.0 $\pm$ 0.4	20	60
38	T 9.1*4.6*5	9.1 $\pm$ 0.4	4.6 $\pm$ 0.4	5.0 $\pm$ 0.4	20	70
39	T 9*4.5*5	9.0 $\pm$ 0.4	4.5 $\pm$ 0.4	5.0 $\pm$ 0.4	20	70
40	T 9*8*5	9.0 $\pm$ 0.4	8.0 $\pm$ 0.4	5.0 $\pm$ 0.4	30	80
41	T 9.5*5*5	9.5 $\pm$ 0.4	5.0 $\pm$ 0.4	5.0 $\pm$ 0.4	20	70
42	T 9.5*9.5*5	9.5 $\pm$ 0.4	9.5 $\pm$ 0.4	5.0 $\pm$ 0.4	35	90
43	T 9.8*6.5*6	9.8 $\pm$ 0.4	6.5 $\pm$ 0.4	6.0 $\pm$ 0.4	25	75

EMI countermeasure for ferrite cores

◎ Detailed specifications and parameters are introduced

詳細規格及參數介紹

UNIT: mm

NO	SIZE CODE	A	B	C	Impedance(Ω) MIN	
					25 MHz	100 MHz
44	T 10*2*6	10 $\pm$ 0.4	2.0 $\pm$ 0.4	6.0 $\pm$ 0.4	15	60
45	T 10*3*6	10 $\pm$ 0.4	3.0 $\pm$ 0.4	6.0 $\pm$ 0.4	20	60
46	T 10*4*6	10 $\pm$ 0.4	4.0 $\pm$ 0.4	6.0 $\pm$ 0.4	20	65
47	T 10*4*7	10 $\pm$ 0.4	4.0 $\pm$ 0.4	7.0 $\pm$ 0.4	20	60
48	T 10*5*5	10 $\pm$ 0.4	5.0 $\pm$ 0.4	5.0 $\pm$ 0.4	25	75
49	T 10*5*6	10 $\pm$ 0.4	5.0 $\pm$ 0.4	6.0 $\pm$ 0.4	20	70
50	T 10*6*6	10 $\pm$ 0.4	6.0 $\pm$ 0.4	6.0 $\pm$ 0.4	25	75
51	T 10*5*7	10 $\pm$ 0.4	5.0 $\pm$ 0.4	7.0 $\pm$ 0.4	20	65
52	T 10*7*6	10.0 $\pm$ 0.4	7.0 $\pm$ 0.4	6.0 $\pm$ 0.4	25	75
53	T 10*7*6	10.0 $\pm$ 0.4	7.0 $\pm$ 0.4	6.0 $\pm$ 0.4	25	80
54	T 10*7*7	10.0 $\pm$ 0.4	7.0 $\pm$ 0.4	7.0 $\pm$ 0.4	20	70
55	T 10*7.5*7	10.0 $\pm$ 0.4	7.0 $\pm$ 0.4	7.0 $\pm$ 0.4	25	70
56	T 10*8*6	10.0 $\pm$ 0.4	8.0 $\pm$ 0.4	6.0 $\pm$ 0.4	30	80
57	T 10*10*4.2	10.0 $\pm$ 0.4	10.0 $\pm$ 0.4	4.2 $\pm$ 0.4	55	115
58	T 10*10*5	10.0 $\pm$ 0.4	10.0 $\pm$ 0.4	5.0 $\pm$ 0.4	35	85
59	T 10*10*6	10.0 $\pm$ 0.4	10.0 $\pm$ 0.4	6.0 $\pm$ 0.4	35	85
60	T 10*10*7	10.0 $\pm$ 0.4	10.0 $\pm$ 0.4	7.0 $\pm$ 0.4	30	80
61	T 10.5*10*7.3	10.5 $\pm$ 0.4	10.0 $\pm$ 0.4	7.3 $\pm$ 0.4	25	75
62	T 10*20*4.2	10.0 $\pm$ 0.4	20.0 $\pm$ 0.6	4.2 $\pm$ 0.4	100	200
63	T 11*8*5	11.0 $\pm$ 0.5	8.0 $\pm$ 0.4	5.0 $\pm$ 0.4	30	90
64	T 12*4*6	12.0 $\pm$ 0.5	4.0 $\pm$ 0.4	6.0 $\pm$ 0.4	25	70
65	T 12*5*8	12.0 $\pm$ 0.5	5.0 $\pm$ 0.4	8.0 $\pm$ 0.4	20	65
66	T 12*5.3*7.3	12.0 $\pm$ 0.5	5.3 $\pm$ 0.4	7.3 $\pm$ 0.4	20	75
67	T 12*5.5*7	12.0 $\pm$ 0.5	5.5 $\pm$ 0.4	7.0 $\pm$ 0.4	20	70
68	T 12*6*6	12.0 $\pm$ 0.5	6.0 $\pm$ 0.4	6.0 $\pm$ 0.4	25	80
69	T 12*6*7.3	12.0 $\pm$ 0.5	6.0 $\pm$ 0.4	7.3 $\pm$ 0.4	25	70
70	T 12*7*8	12.0 $\pm$ 0.5	7.0 $\pm$ 0.4	8.0 $\pm$ 0.4	20	70
71	T 12*8*6	12.0 $\pm$ 0.5	8.0 $\pm$ 0.4	6.0 $\pm$ 0.4	35	85

EMI countermeasure for ferrite cores

© Detailed specifications and parameters are introduced

詳細規格及參數介紹

UNIT: mm

NO	SIZE CODE	A	B	C	Impedance(Ω) MIN	
					25 MHz	100 MHz
72	T 12*8*7	12.0 $\pm$ 0.5	8.0 $\pm$ 0.4	7.0 $\pm$ 0.4	30	85
73	T 12*9*5.6	12.0 $\pm$ 0.5	9.0 $\pm$ 0.4	5.6 $\pm$ 0.4	40	105
74	T 12*10*3.55	12.0 $\pm$ 0.5	10.0 $\pm$ 0.4	3.55 $\pm$ 0.4	85	180
75	T 12*10*7	12.0 $\pm$ 0.5	10.0 $\pm$ 0.4	7.0 $\pm$ 0.4	35	85
76	T 12*12*5.6	12.0 $\pm$ 0.5	12.0 $\pm$ 0.5	5.6 $\pm$ 0.4	45	110
77	T 12*12*6.5	12.0 $\pm$ 0.5	12.0 $\pm$ 0.5	6.5 $\pm$ 0.4	40	95
78	T 12*12*8	12.0 $\pm$ 0.5	12.0 $\pm$ 0.5	8.0 $\pm$ 0.4	35	90
79	T 12.5*6.5*5	12.5 $\pm$ 0.5	6.5 $\pm$ 0.4	5.0 $\pm$ 0.4	35	85
80	T 12.5*12*8	12.7 $\pm$ 0.5	12.0 $\pm$ 0.5	8.0 $\pm$ 0.4	35	90
81	T 12.7*6.35*7.9	12.7 $\pm$ 0.5	6.35 $\pm$ 0.4	7.9 $\pm$ 0.4	25	70
82	T 12.7*4.8*7.9	12.7 $\pm$ 0.5	4.8 $\pm$ 0.4	7.9 $\pm$ 0.4	20	70
83	T 12.7*9.6*7.9	12.7 $\pm$ 0.5	9.6 $\pm$ 0.4	7.9 $\pm$ 0.4	30	90
84	T 12.7*12.7*7.9	12.7 $\pm$ 0.5	12.7 $\pm$ 0.5	7.9 $\pm$ 0.4	45	100
85	T 12.7*12.7*11	12.7 $\pm$ 0.5	12.7 $\pm$ 0.4	11.0 $\pm$ 0.5	40	95
86	T 13*3*7	13.0 $\pm$ 0.5	3.0 $\pm$ 0.4	7.0 $\pm$ 0.4	20	70
87	T 13*6.3*7	13.0 $\pm$ 0.5	6.3 $\pm$ 0.4	7.0 $\pm$ 0.4	20	65
88	T 13*6.5*8	13.0 $\pm$ 0.5	6.5 $\pm$ 0.4	8.0 $\pm$ 0.4	25	75
89	T 13*7*7	13.0 $\pm$ 0.5	7.0 $\pm$ 0.4	7.0 $\pm$ 0.4	20	70
90	T 13*10*8.2	13.0 $\pm$ 0.5	10.0 $\pm$ 0.4	8.2 $\pm$ 0.4	30	80
91	T 13*12.7*7.1	13.0 $\pm$ 0.5	12.7 $\pm$ 0.5	7.1 $\pm$ 0.4	30	85
92	T 14*4*8	14.0 $\pm$ 0.5	4.0 $\pm$ 0.4	8.0 $\pm$ 0.4	40	100
93	T 14*5*8	14.0 $\pm$ 0.5	5.0 $\pm$ 0.4	8.0 $\pm$ 0.4	20	70
94	T 14*5*9	14.0 $\pm$ 0.5	5.0 $\pm$ 0.4	9.0 $\pm$ 0.4	20	70
95	T 14*5.5*9	14.0 $\pm$ 0.5	5.5 $\pm$ 0.4	9.0 $\pm$ 0.5	20	70
96	T 14*14*10	14.0 $\pm$ 0.5	14.0 $\pm$ 0.5	10.0 $\pm$ 0.5	20	70
97	T 14.2*5*10	14.2 $\pm$ 0.5	5.0 $\pm$ 0.4	10.0 $\pm$ 0.5	35	90
98	T 14.2*5.5*8.7	14.2 $\pm$ 0.5	5.5 $\pm$ 0.4	8.7 $\pm$ 0.4	20	65
99	T 14.2*7*8	14.2 $\pm$ 0.5	7.0 $\pm$ 0.4	8.0 $\pm$ 0.4	20	70

EMI countermeasure for ferrite cores

© Detailed specifications and parameters are introduced

詳細規格及參數介紹

UNIT: mm

NO	SIZE CODE	A	B	C	Impedance(Ω) MIN	
					25 MHz	100 MHz
100	T 14.2*8*9	14.2 $\pm$ 0.5	8.0 $\pm$ 0.4	9.0 $\pm$ 0.5	25	80
101	T 14.2*10*8	14.2 $\pm$ 0.5	10.0 $\pm$ 0.4	8.0 $\pm$ 0.4	25	75
102	T 14.2*8*10	14.2 $\pm$ 0.5	8.0 $\pm$ 0.4	10.0 $\pm$ 0.5	35	95
103	T 14.2*8*10	14.2 $\pm$ 0.5	8.0 $\pm$ 0.4	10.0 $\pm$ 0.5	20	70
104	T 14.2*10.16*6.35	14.2 $\pm$ 0.5	10.16 $\pm$ 0.4	6.35 $\pm$ 0.4	40	100
105	T 14.2*12*7.8	14.2 $\pm$ 0.5	12.0 $\pm$ 0.5	7.8 $\pm$ 0.4	45	105
106	T 14.2*12.7*6.7	14.2 $\pm$ 0.5	12.7 $\pm$ 0.5	6.7 $\pm$ 0.4	50	110
107	T 14.2*13*8	14.2 $\pm$ 0.5	13.0 $\pm$ 0.5	8.0 $\pm$ 0.4	45	110
108	T 14.2*13.8*6.35	14.2 $\pm$ 0.5	13.8 $\pm$ 0.5	6.35 $\pm$ 0.4	50	130
109	T 14.5*8*10	14.5 $\pm$ 0.5	8.0 $\pm$ 0.4	10.0 $\pm$ 0.5	25	70
110	T 15*5*10	15.0 $\pm$ 0.5	5.0 $\pm$ 0.4	10.0 $\pm$ 0.5	20	65
111	T 15*15*10.5	15.0 $\pm$ 0.5	15.0 $\pm$ 0.5	10.5 $\pm$ 0.5	30	90
112	T 15.2*12.5*10.5	15.2 $\pm$ 0.5	12.5 $\pm$ 0.5	10.5 $\pm$ 0.5	30	85
113	T 15.6*14*13.4	15.6 $\pm$ 0.5	14.0 $\pm$ 0.5	13.4 $\pm$ 0.5	25	75
114	T 15.87*14.3*7.9	15.87 $\pm$ 0.5	14.3 $\pm$ 0.5	7.9 $\pm$ 0.4	55	125
115	T 16*4*9	16.0 $\pm$ 0.5	4.0 $\pm$ 0.4	9.0 $\pm$ 0.5	20	70
116	T 16*4*10	16.0 $\pm$ 0.5	4.0 $\pm$ 0.4	10.0 $\pm$ 0.5	20	65
117	T 16*5*10	16.0 $\pm$ 0.5	5.0 $\pm$ 0.4	10.0 $\pm$ 0.5	20	70
118	T 16*5.4*9	16.0 $\pm$ 0.5	5.4 $\pm$ 0.4	9.0 $\pm$ 0.5	20	70
119	T 16*7*9	16.0 $\pm$ 0.5	7.0 $\pm$ 0.4	9.0 $\pm$ 0.5	30	80
120	T 16*7*10	16.0 $\pm$ 0.5	7.0 $\pm$ 0.4	10.0 $\pm$ 0.5	25	75
121	T 16*8*10	16.0 $\pm$ 0.5	8.0 $\pm$ 0.4	10.0 $\pm$ 0.5	25	80
122	T 16*8*12	16.0 $\pm$ 0.5	8.0 $\pm$ 0.4	12.0 $\pm$ 0.5	20	70
123	T 16*10*7	16.0 $\pm$ 0.5	10.0 $\pm$ 0.4	7.0 $\pm$ 0.4	40	105
124	T 16*10*8	16.0 $\pm$ 0.5	10.0 $\pm$ 0.4	8.0 $\pm$ 0.4	45	105
125	T 16*10*9	16.0 $\pm$ 0.5	10.0 $\pm$ 0.4	9.0 $\pm$ 0.5	40	95
126	T 16*10*10	16.0 $\pm$ 0.5	10.0 $\pm$ 0.4	10.0 $\pm$ 0.5	30	85
127	T 16*10*12	16.0 $\pm$ 0.5	10.0 $\pm$ 0.4	12.0 $\pm$ 0.5	25	75

EMI countermeasure for ferrite cores

© Detailed specifications and parameters are introduced

詳細規格及參數介紹

UNIT: mm

NO	SIZE CODE	A	B	C	Impedance(Ω) MIN	
					25 MHz	100 MHz
128	T 16*12*9.5	16.0 $\pm$ 0.5	12.0 $\pm$ 0.5	9.5 $\pm$ 0.5	30	90
129	T 16*12*10	16.0 $\pm$ 0.5	12.0 $\pm$ 0.5	10.0 $\pm$ 0.5	30	90
130	T 16*13*8	16.0 $\pm$ 0.5	13.0 $\pm$ 0.5	8.0 $\pm$ 0.5	45	115
131	T 16*13*9	16.0 $\pm$ 0.5	13.0 $\pm$ 0.5	9.0 $\pm$ 0.5	40	100
132	T 16*14*10	16.0 $\pm$ 0.5	14.0 $\pm$ 0.5	10.0 $\pm$ 0.5	40	100
133	T 16*15*9	16.0 $\pm$ 0.5	15.0 $\pm$ 0.5	9.0 $\pm$ 0.5	50	115
134	T 16*16*8	16.0 $\pm$ 0.5	16.0 $\pm$ 0.5	8.0 $\pm$ 0.4	65	130
135	T 16*16*9	16.0 $\pm$ 0.5	16.0 $\pm$ 0.5	9.0 $\pm$ 0.5	50	115
136	T 16*16*10	16.0 $\pm$ 0.5	16.0 $\pm$ 0.5	9.5 $\pm$ 0.5	50	110
137	T 17.5*6.35*9.5	17.5 $\pm$ 0.6	6.35 $\pm$ 0.4	9.5 $\pm$ 0.5	25	75
138	T 17.5*7*9.6	17.5 $\pm$ 0.6	7.0 $\pm$ 0.4	9.6 $\pm$ 0.5	30	85
139	T 17.5*10*8	17.5 $\pm$ 0.6	10.0 $\pm$ 0.4	8.0 $\pm$ 0.4	40	100
140	T 17.5*11*9.5	17.5 $\pm$ 0.6	11.0 $\pm$ 0.5	9.5 $\pm$ 0.5	40	90
141	T 17.5*12*11.3	17.5 $\pm$ 0.6	12.0 $\pm$ 0.5	11.3 $\pm$ 0.5	30	90
142	T 17.5*12.5*12	17.5 $\pm$ 0.6	12.5 $\pm$ 0.5	12.0 $\pm$ 0.5	30	90
143	T 17.5*9.5*12.7	17.5 $\pm$ 0.6	12.7 $\pm$ 0.5	12.7 $\pm$ 0.5	25	80
144	T 17.5*12.7*9.5	17.5 $\pm$ 0.6	12.7 $\pm$ 0.5	9.5 $\pm$ 0.5	45	110
145	T 17.5*12.7*10.7	17.5 $\pm$ 0.6	12.7 $\pm$ 0.5	10.7 $\pm$ 0.5	40	95
146	T 17.5*13.5*9.5	17.5 $\pm$ 0.6	13.5 $\pm$ 0.5	9.5 $\pm$ 0.5	50	110
147	T 17.5*15*9.5	17.5 $\pm$ 0.6	15.0 $\pm$ 0.5	9.5 $\pm$ 0.5	55	125
148	T 18*6*10	18.0 $\pm$ 0.6	6.0 $\pm$ 0.4	10.0 $\pm$ 0.5	25	75
149	T 18*7*10	18.0 $\pm$ 0.6	7.0 $\pm$ 0.4	10.0 $\pm$ 0.5	30	80
150	T 18*8*10	18.0 $\pm$ 0.6	8.0 $\pm$ 0.4	10.0 $\pm$ 0.5	30	85
151	T 18*10*10	18.0 $\pm$ 0.6	10.0 $\pm$ 0.4	10.0 $\pm$ 0.5	35	90
152	T 18*12*10	18.0 $\pm$ 0.6	12.0 $\pm$ 0.5	10.0 $\pm$ 0.5	45	105
153	T 18*12*12	18.0 $\pm$ 0.6	12.0 $\pm$ 0.5	12.0 $\pm$ 0.5	30	85
154	T 18*14*10	18.0 $\pm$ 0.6	14.0 $\pm$ 0.5	10.0 $\pm$ 0.5	50	110
155	T 18*15*10	18.0 $\pm$ 0.6	15.0 $\pm$ 0.5	10.0 $\pm$ 0.5	50	120

EMI countermeasure for ferrite cores

© Detailed specifications and parameters are introduced

詳細規格及參數介紹

UNIT: mm

NO	SIZE CODE	A	B	C	Impedance(Ω) MIN	
					25 MHz	100 MHz
156	T 18*18*10	18.0 $\pm$ 0.6	18.0 $\pm$ 0.5	10.0 $\pm$ 0.5	70	130
157	T 18.2*6.4*11.2	18.2 $\pm$ 0.6	6.4 $\pm$ 0.4	11.2 $\pm$ 0.5	20	75
158	T 18.2*6.5*10	18.2 $\pm$ 0.6	6.5 $\pm$ 0.4	10.0 $\pm$ 0.5	25	80
159	T 18.4*9.6*12.5	18.4 $\pm$ 0.6	9.6 $\pm$ 0.4	12.5 $\pm$ 0.5	25	85
160	T 18.2*12.5*9.5	18.2 $\pm$ 0.6	12.5 $\pm$ 0.5	9.5 $\pm$ 0.5	50	110
161	T 18.4*14.3*9.5	18.4 $\pm$ 0.6	14.0 $\pm$ 0.5	9.5 $\pm$ 0.5	50	115
162	T 19*11*13	19.0 $\pm$ 0.6	11.0 $\pm$ 0.5	13.0 $\pm$ 0.5	30	80
163	T 19.5*12.7*9.5	19.5 $\pm$ 0.6	12.7 $\pm$ 0.5	9.5 $\pm$ 0.5	50	120
164	T 20*5*10	20.0 $\pm$ 0.6	5.0 $\pm$ 0.4	10.0 $\pm$ 0.5	25	75
165	T 20*7*10	20.0 $\pm$ 0.6	7.0 $\pm$ 0.4	10.0 $\pm$ 0.5	30	80
166	T 20*8*10	20.0 $\pm$ 0.6	8.0 $\pm$ 0.4	10.0 $\pm$ 0.5	35	90
167	T 20*10*10	20.0 $\pm$ 0.6	10.0 $\pm$ 0.4	10.0 $\pm$ 0.5	40	95
168	T 20*15*10	20.0 $\pm$ 0.6	15.0 $\pm$ 0.5	10.0 $\pm$ 0.5	65	135
169	T 20.8*30*11.6	20.8 $\pm$ 0.6	30.0 $\pm$ 0.5	11.6 $\pm$ 0.5	90	200
170	T 21*13*12	21.0 $\pm$ 0.6	13.0 $\pm$ 0.5	12.0 $\pm$ 0.5	35	95
171	T 21*12*13.2	21.0 $\pm$ 0.6	12.0 $\pm$ 0.5	13.2 $\pm$ 0.5	30	85
172	T 21*6*12.7	21.0 $\pm$ 0.6	6.0 $\pm$ 0.4	12.7 $\pm$ 0.5	20	75
173	T 22*8*14	22.0 $\pm$ 0.6	8.0 $\pm$ 0.4	14.0 $\pm$ 0.5	30	80
174	T 22.5*6.4*13.8	22.5 $\pm$ 0.6	6.4 $\pm$ 0.4	13.8 $\pm$ 0.5	25	75
175	T 22.5*6.4*14.3	22.5 $\pm$ 0.6	6.4 $\pm$ 0.4	14.3 $\pm$ 0.5	25	70
176	T 22.5*8*13.8	22.5 $\pm$ 0.6	8.0 $\pm$ 0.4	13.8 $\pm$ 0.5	30	80
177	T 22.5*10*13.8	22.5 $\pm$ 0.6	10.0 $\pm$ 0.4	13.8 $\pm$ 0.5	35	90
178	T 22.5*9.5*13.5	22.5 $\pm$ 0.6	9.5 $\pm$ 0.4	13.5 $\pm$ 0.5	30	85
179	T 22.5*12.7*13.5	22.5 $\pm$ 0.6	12.7 $\pm$ 0.5	13.5 $\pm$ 0.5	40	95
180	T 23*10*18	23.0 $\pm$ 0.6	10.0 $\pm$ 0.4	18.0 $\pm$ 0.5	20	70
181	T 23.5*9.5*12.7	23.5 $\pm$ 0.6	9.5 $\pm$ 0.4	12.7 $\pm$ 0.5	35	90
182	T 24*14*11.4	24.0 $\pm$ 0.6	14.0 $\pm$ 0.5	11.4 $\pm$ 0.5	50	120
183	T 25*8*15	25.0 $\pm$ 0.6	8.0 $\pm$ 0.4	15.0 $\pm$ 0.5	25	80

EMI countermeasure for ferrite cores

© Detailed specifications and parameters are introduced

詳細規格及參數介紹

UNIT: mm

NO	SIZE CODE	A	B	C	Impedance(Ω) MIN	
					25 MHz	100 MHz
184	T 25*10*15	25.0 $\pm$ 0.6	10.0 $\pm$ 0.4	15.0 $\pm$ 0.5	30	85
185	T 25*12*15	25.0 $\pm$ 0.6	12.0 $\pm$ 0.5	15.0 $\pm$ 0.5	40	95
186	T 25*15*13	25.0 $\pm$ 0.6	15.0 $\pm$ 0.5	13.0 $\pm$ 0.5	55	125
187	T 25*15*15	25.0 $\pm$ 0.6	15.0 $\pm$ 0.5	15.0 $\pm$ 0.5	45	110
188	T 26*8*16	26.0 $\pm$ 0.6	8.0 $\pm$ 0.4	16.0 $\pm$ 0.6	25	80
189	T 26*15*13	26.0 $\pm$ 0.6	15.0 $\pm$ 0.5	13.0 $\pm$ 0.5	50	120
190	T 28*7.5*16	28.0 $\pm$ 0.7	7.5 $\pm$ 0.4	16.0 $\pm$ 0.6	30	80
191	T 28*8*18	28.0 $\pm$ 0.7	8.0 $\pm$ 0.4	18.0 $\pm$ 0.6	25	80
192	T 28*10*16	28.0 $\pm$ 0.7	10.0 $\pm$ 0.4	16.0 $\pm$ 0.6	35	90
193	T 28*10*18	28.0 $\pm$ 0.7	10.0 $\pm$ 0.4	18.0 $\pm$ 0.6	30	85
194	T 28*13*16	28.0 $\pm$ 0.7	13.0 $\pm$ 0.5	16.0 $\pm$ 0.6	45	105
195	T 28*20*16	28.0 $\pm$ 0.7	20.0 $\pm$ 0.5	16.0 $\pm$ 0.6	50	135
196	T 28.5*28.5*13.8	28.5 $\pm$ 0.7	28.5 $\pm$ 0.7	13.8 $\pm$ 0.5	120	250
197	T 28*28*16	28.0 $\pm$ 0.7	28.0 $\pm$ 0.7	16.0 $\pm$ 0.6	85	200
198	T 29*7.7*19	29.0 $\pm$ 1.0	7.7 $\pm$ 0.4	19.0 $\pm$ 0.6	25	75
199	T 29*10*19	29.0 $\pm$ 1.0	10.0 $\pm$ 0.4	19.0 $\pm$ 0.6	30	90
200	T 29*12*19	29.0 $\pm$ 1.0	12.0 $\pm$ 0.5	19.0 $\pm$ 0.6	35	90
201	T 29*13.8*19	29.0 $\pm$ 1.0	13.8 $\pm$ 0.5	19.0 $\pm$ 0.6	45	95
202	T 29*15*19	29.0 $\pm$ 1.0	15.0 $\pm$ 0.5	19.0 $\pm$ 0.6	35	100
203	T 31*5*19	31.0 $\pm$ 1.0	5.0 $\pm$ 0.4	19.0 $\pm$ 0.6	20	70
204	T 31*7*19	31.0 $\pm$ 1.0	7.0 $\pm$ 0.4	19.0 $\pm$ 0.6	25	80
205	T 31*8*19	31.0 $\pm$ 1.0	8.0 $\pm$ 0.4	19.0 $\pm$ 0.6	25MHz	80
206	T 31*10*19	31.0 $\pm$ 1.0	10.0 $\pm$ 0.4	19.0 $\pm$ 0.6	35	90
207	T 31*12*18	31.0 $\pm$ 1.0	12.0 $\pm$ 0.5	18.0 $\pm$ 0.6	35	105
208	T 31*12*21	31.0 $\pm$ 1.0	12.0 $\pm$ 0.5	21.0 $\pm$ 0.6	30	85
209	T 31*13*19	31.0 $\pm$ 1.0	13.0 $\pm$ 0.5	19.0 $\pm$ 0.6	40	100
210	T 31*16*19	31.0 $\pm$ 1.0	16.0 $\pm$ 0.5	19.0 $\pm$ 0.6	50	115
211	T 31*18*19	31.0 $\pm$ 1.0	18.0 $\pm$ 0.5	19.0 $\pm$ 0.6	50	125

EMI countermeasure for ferrite cores

© Detailed specifications and parameters are introduced

詳細規格及參數介紹

UNIT: mm

NO	SIZE CODE	A	B	C	Impedance(Ω) MIN	
					25 MHz	100 MHz
212	T 35*6*20.8	35.0 $\pm$ 1.0	6.0 $\pm$ 0.4	20.8 $\pm$ 0.6	30	75
213	T 35*12.6*20.8	35.0 $\pm$ 1.0	12.6 $\pm$ 0.5	20.8 $\pm$ 0.6	50	100
214	T 36*10*20	36.0 $\pm$ 1.0	10.0 $\pm$ 0.4	20.0 $\pm$ 0.6	30	70
215	T 36*12*25	36.0 $\pm$ 1.0	12.0 $\pm$ 0.5	25.0 $\pm$ 0.6	30	90
216	T 36*12.7*25	36.0 $\pm$ 1.0	12.7 $\pm$ 0.5	25.0 $\pm$ 0.6	35	85
217	T 36*13*23	36.0 $\pm$ 1.0	13.0 $\pm$ 0.5	23.0 $\pm$ 0.6	35	95
218	T 36*20*23	36.0 $\pm$ 1.0	20.0 $\pm$ 0.5	23.0 $\pm$ 0.6	50	115
219	T 36*23*15	36.0 $\pm$ 1.0	23.0 $\pm$ 0.5	15.0 $\pm$ 0.6	100	210
220	T 40.6*15*27.4	40.6 $\pm$ 1.5	15.0 $\pm$ 0.5	27.4 $\pm$ 0.6	40	90
221	T 59.4*12.8*34.8	59.4 $\pm$ 1.8	12.8 $\pm$ 0.5	34.8 $\pm$ 1.0	65	105