

EMI countermeasure for ferrite cores

◎ Product introduction 產品介紹



- This product is a round cable topical products
圓形電纜的外用產品
- Various shapes and materials variety
各種形狀和材質品種豐富
- The number of windings can play a noise countermeasure effect
繞線圈數即可簡單發揮噪音對策效果
- For RoHS instructions corresponding products
為RoHS指令對應產品

◎ Product application 產品應用

- Imaging equipment、Audio equipment、Electrical equipment、Communication equipment
影像設備、音響設備、電裝設備、通信設備等

◎ Product Identification 產品標識

A2 RH 14.2 * 15 * 6.35

A2-----Material code 材料代碼

RH-----Product shape 產品形狀


14.2-----Outside diameter 產品外徑

16-----Height 高度

6.35-----Inner hole 內徑

EMI countermeasure for ferrite cores

◎Shape&Dimensions 形狀與尺寸:

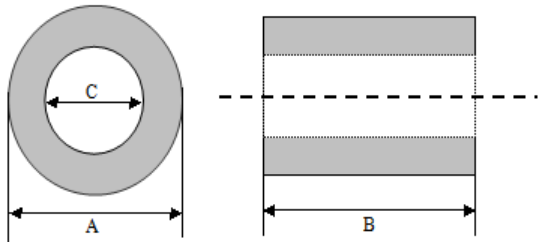

Test Instruments 測試儀器

TEST INSTRUMENTS	HP 4191A
LCR METER	HP 4286
WIRE	0.65T.C.W*100m/m 1/2Ts
TEMPERATURE	15°C to 35°C
HUMIDITY	25% to 85% RH

◎ Detailed specifications and parameters are introduced

詳細規格及參數介紹

UNIT: mm

NO	SIZE CODE	A	B	C	Impedance(Ω) MIN	
					25 MHz	100 MHz
1	RH 3.5*4*1.8	3.5 \pm 0.3	4.0 \pm 0.3	1.8 \pm 0.3	20	70
2	RH 3.5*4.7*0.8	3.5 \pm 0.3	4.7 \pm 0.3	0.8 \pm 0.3	45	95
3	RH 3.5*4.2*1.3	3.5 \pm 0.3	4.2 \pm 0.3	1.3 \pm 0.3	30	80
4	RH 3.5*5*0.8	3.5 \pm 0.3	5.0 \pm 0.3	0.8 \pm 0.3	40	100
5	RH 3.5*5*1.2	3.5 \pm 0.3	5.0 \pm 0.3	1.2 \pm 0.3	30	85
6	RH 3.5*6*0.8	3.5 \pm 0.3	6.0 \pm 0.3	0.8 \pm 0.3	55	105
7	RH 3.5*5*1.8	3.5 \pm 0.3	5.0 \pm 0.3	1.8 \pm 0.3	25	75
8	RH 3.5*8*0.8	3.5 \pm 0.3	8.0 \pm 0.3	0.8 \pm 0.3	70	130
9	RH 3.5*9*0.8	3.5 \pm 0.3	9.0 \pm 0.4	0.8 \pm 0.3	80	145
10	RH 3.5*10*0.8	3.5 \pm 0.3	10.0 \pm 0.4	0.8 \pm 0.3	90	155
11	RH 3.5*10*1.8	3.5 \pm 0.3	10.0 \pm 0.4	1.8 \pm 0.3	40	100
12	RH 3.5*9*1.3	3.5 \pm 0.3	9.0 \pm 0.4	1.3 \pm 0.3	55	120
13	RH 4*5*2	4.0 \pm 0.3	5.0 \pm 0.4	2.0 \pm 0.3	25	75
14	RH 4*6*2	4.0 \pm 0.3	6.0 \pm 0.4	2.0 \pm 0.3	30	80
15	RH 4*7*2	4.0 \pm 0.3	7.0 \pm 0.4	2.0 \pm 0.3	30	80

EMI countermeasure for ferrite cores

◎ Detailed specifications and parameters are introduced

詳細規格及參數介紹

UNIT: mm

NO	SIZE CODE	A	B	C	Impedance(Ω) MIN	
					25 MHz	100 MHz
16	RH 4*10*1.5	4.0 \pm 0.3	10.0 \pm 0.5	1.5 \pm 0.3	60	110
17	RH 4*10*2	4.0 \pm 0.3	10.0 \pm 0.4	2.0 \pm 0.3	45	95
18	RH 4*12*2	4.0 \pm 0.3	12.0 \pm 0.5	2.0 \pm 0.4	50	100
19	RH 4*12.5*1.5	4.0 \pm 0.3	12.5 \pm 0.5	1.5 \pm 0.3	70	140
20	RH 4.6*11*2	4.6 \pm 0.3	11.0 \pm 0.5	2.0 \pm 0.4	50	120
21	RH 5*6*2.4	5.0 \pm 0.4	6.0 \pm 0.4	2.4 \pm 0.3	35	90
22	RH 5*9*3	5.0 \pm 0.4	9.0 \pm 0.4	3.0 \pm 0.4	35	80
23	RH 5*8*3	5.0 \pm 0.4	8.0 \pm 0.4	3.0 \pm 0.4	35	80
24	RH 5.5*8*3	5.5 \pm 0.4	8.0 \pm 0.4	3.0 \pm 0.4	35	80
25	RH 5.5*9*3	5.5 \pm 0.4	9.0 \pm 0.4	3.0 \pm 0.4	35	80
26	RH 5*10*2.5	5.0 \pm 0.4	10.0 \pm 0.4	2.5 \pm 0.4	50	110
27	RH 5*10*3	5.0 \pm 0.4	10.0 \pm 0.4	3.0 \pm 0.4	40	90
28	RH 5.1*12.7*2.3	5.1 \pm 0.4	12.7 \pm 0.5	2.3 \pm 0.4	70	125
29	RH 5.6*10*3.1	5.6 \pm 0.4	10.0 \pm 0.4	3.1 \pm 0.4	35	90
30	RH 5.5*12.7*3	5.5 \pm 0.4	12.7 \pm 0.5	3.0 \pm 0.4	50	110
31	RH 6*8*3	6.0 \pm 0.4	8.0 \pm 0.4	3.0 \pm 0.4	40	90
32	RH 6*10*3	6.0 \pm 0.4	10.0 \pm 0.4	3.0 \pm 0.4	45	105
33	RH 6*10*4	6.0 \pm 0.4	10.0 \pm 0.4	4.0 \pm 0.4	30	80
34	RH 6*12.7*3	6.0 \pm 0.4	12.7 \pm 0.5	3.0 \pm 0.4	45	115
35	RH 6*10.7*3	6.0 \pm 0.4	10.7 \pm 0.4	3.0 \pm 0.4	40	100
36	RH 6*18*3	6.0 \pm 0.4	18.0 \pm 0.5	3.0 \pm 0.4	75	145
37	RH 6.35*12.7*3.3	6.35 \pm 0.4	12.7 \pm 0.5	3.3 \pm 0.4	55	125
38	RH 6.35*15.3*3.2	6.35 \pm 0.4	15.3 \pm 0.5	3.2 \pm 0.4	65	125
39	RH 6.35*15.8*3.3	6.35 \pm 0.4	15.8 \pm 0.5	3.3 \pm 0.4	75	165
40	RH 6.5*8*4.5	6.5 \pm 0.4	8.0 \pm 0.4	4.5 \pm 0.4	25	75
41	RH 6.5*10*4.3	6.5 \pm 0.4	10.0 \pm 0.4	4.3 \pm 0.4	30	80
42	RH 6.5*12.7*4.5	6.5 \pm 0.4	12.7 \pm 0.5	4.5 \pm 0.4	30	90
43	RH 6.78*14.2*4	6.78 \pm 0.4	14.2 \pm 0.5	4.0 \pm 0.4	50	110

EMI countermeasure for ferrite cores

◎ Detailed specifications and parameters are introduced

詳細規格及參數介紹

UNIT: mm

NO	SIZE CODE	A	B	C	Impedance(Ω) MIN	
					25 MHz	100 MHz
44	RH 6.5*15.6*4	6.5±0.4	15.6±0.5	4.0±0.4	55	119
45	RH 7*8*5	7.0±0.4	8.0±0.4	5.0±0.4	20	70
46	RH 7*7*4	7.0±0.4	7.0±0.4	4.0±0.4	25	80
47	RH 7*10*4.5	7.0±0.4	10.0±0.4	4.5±0.4	30	85
48	RH 7.5*8*5.3	7.5±0.4	8.0±0.4	5.3±0.4	25	75
49	RH 7.5*20*4	7.5±0.4	20.0±0.5	4.0±0.4	70	150
50	RH 7.75*13*4	7.75±0.4	13.0±0.5	4.0±0.4	70	115
51	RH 7.8*18*4	7.8±0.4	18.0±0.5	4.0±0.4	70	155
52	RH 7.75*19*4	7.75±0.4	19.0±0.5	4.0±0.4	25	75
53	RH 7.8*12.7*4	7.8±0.4	12.7±0.5	4.0±0.4	25	80
54	RH 7.8*13*4.5	7.8±0.4	13.0±0.5	4.5±0.4	20	70
55	RH 7.8*12.7*4.5	7.8±0.4	12.7±0.5	4.5±0.4	25	70
56	RH 7.8*14.2*4	7.8±0.4	14.2±0.5	4.0±0.4	30	80
57	RH 7.8*14.2*4.5	7.8±0.4	14.2±0.5	4.5±0.4	55	115
58	RH 7.8*18*4.5	7.8±0.4	18.0±0.5	4.5±0.4	35	85
59	RH 7.8*25*4.5	7.8±0.4	25.0±0.6	4.5±0.4	35	85
60	RH 7.9*19*4.5	7.9±0.4	19.0±0.5	4.5±0.4	30	80
61	RH 8*9*5	8.0±0.4	9.0±0.4	5.0±0.4	25	75
62	RH 8*9.8*6	8.0±0.4	9.8±0.4	6.0±0.4	100	200
63	RH 8*10*3.6	8.0±0.4	10.0±0.4	3.6±0.3	30	90
64	RH 8*10*5.6	8.0±0.4	10.0±0.4	5.6±0.4	25	70
65	RH 8*12*4	8.0±0.4	12.0±0.4	4.0±0.4	20	65
66	RH 8*12*5.5	8.0±0.4	12.0±0.4	5.5±0.4	20	75
67	RH 8*12.9*5.6	8.0±0.4	12.9±0.5	5.6±0.4	20	70
68	RH 8*15*5.6	8.0±0.4	15.0±0.5	5.6±0.4	25	80
69	RH 8*20*3.6	8.0±0.4	20.0±0.5	3.6±0.3	25	70
70	RH 8*20*5.6	8.0±0.4	20.0±0.5	5.6±0.4	20	70
71	RH 8.4*20*4.2	8.4±0.4	20.0±0.5	4.2±0.4	35	85

EMI countermeasure for ferrite cores

◎ Detailed specifications and parameters are introduced

詳細規格及參數介紹

UNIT: mm

NO	SIZE CODE	A	B	C	Impedance(Ω) MIN	
					25 MHz	100 MHz
72	RH 9*9.5*5	9.0±0.4	9.5±0.4	5.0±0.4	30	85
73	RH 9*10*4.5	9.0±0.4	10.0±0.4	4.5±0.4	40	105
74	RH 9*10*4.9	9.0±0.4	10.0±0.4	4.9±0.4	85	180
75	RH 9*12*4.5	9.0±0.4	12.0±0.5	4.5±0.4	35	85
76	RH 9*12*5	9.0±0.4	12.0±0.5	5.0±0.4	45	110
77	RH 9*14.5*5	9.0±0.4	14.5±0.5	5.0±0.4	40	95
78	RH 9*16*4.2	9.0±0.4	16.0±0.5	4.2±0.4	35	90
79	RH 9*15.3*4.4	9.0±0.4	15.3±0.5	4.4±0.4	35	85
80	RH 9*16*5	9.0±0.4	16.0±0.5	5.0±0.4	35	90
81	RH 9*16*5.6	9.0±0.4	16.0±0.5	5.6±0.4	25	70
82	RH 9*18*5.6	9.0±0.4	18.0±0.5	5.6±0.4	20	70
83	RH 9*18.5*5	9.0±0.4	18.5±0.5	5.0±0.4	30	90
84	RH 9*20*5.5	9.0±0.4	20.0±0.5	5.5±0.4	45	100
85	RH 9*24.5*5	9.0±0.4	24.5±0.6	5.0±0.4	40	95
86	RH 9*25*5.6	9.0±0.4	25±0.6	5.6±0.4	20	70
87	RH 9.5*10*5	9.5±0.4	10±0.4	5.0±0.4	20	65
88	RH 9.5*10*5.8	9.5±0.4	10±0.4	5.8±0.4	25	75
89	RH 9.5*10.3*5	9.5±0.4	10.3±0.4	5.0±0.4	20	70
90	RH 9.5*10.4*5	9.5±0.4	10.4±0.4	5.0±0.4	30	80
91	RH 9.5*11*4.8	9.5±0.4	11.0±0.5	4.8±0.4	30	85
92	RH 9.5*12*4.8	9.5±0.4	12.0±0.5	4.8±0.4	40	100
93	RH 9.5*12.7*4.75	9.5±0.4	12.7±0.5	4.75±0.4	20	70
94	RH 9.5*14.5*5	9.5±0.4	14.5±0.5	5.0±0.4	20	70
95	RH 9.5*14.5*6	9.5±0.4	14.5±0.5	6.0±0.4	20	70
96	RH 9.5*15*5	9.5±0.4	15.0±0.5	5.0±0.4	20	70
97	RH 9.5*16*5	9.5±0.4	16.0±0.5	5.0±0.4	35	90
98	RH 9.5*18*4.8	9.5±0.4	18.0±0.5	4.8±0.4	20	65
99	RH 9.5*19*5	9.5±0.4	19.0±0.5	5.0±0.4	20	70

EMI countermeasure for ferrite cores

◎ Detailed specifications and parameters are introduced

詳細規格及參數介紹

UNIT: mm

NO	SIZE CODE	A	B	C	Impedance(Ω) MIN	
					25 MHz	100 MHz
100	RH 9.5*19.5*5	9.5 \pm 0.4	19.5 \pm 0.5	5.0 \pm 0.4	25	80
101	RH 9.5*20*4	9.5 \pm 0.4	20.0 \pm 0.5	4.0 \pm 0.4	25	75
102	RH 9.5*20*5	9.5 \pm 0.4	20.0 \pm 0.5	5.0 \pm 0.4	35	95
103	RH 9.5*25*4.8	9.5 \pm 0.4	25.0 \pm 0.6	4.8 \pm 0.4	85	200
104	RH 9.6*15.5*4.6	9.6 \pm 0.4	15.5 \pm 0.5	4.6 \pm 0.4	60	140
105	RH 9.7*10.2*3.8	9.7 \pm 0.4	10.2 \pm 0.4	3.8 \pm 0.3	60	120
106	RH 9.75*25*3.8	9.75 \pm 0.4	25.0 \pm 0.6	3.8 \pm 0.3	115	245
107	RH 9.8*13.5*3.8	9.8 \pm 0.4	13.5 \pm 0.5	3.8 \pm 0.3	75	145
108	RH 9.8*13.5*6.35	9.8 \pm 0.4	13.5 \pm 0.5	6.35 \pm 0.4	40	90
109	RH 9.8*13.5*5.6	9.8 \pm 0.4	13.5 \pm 0.5	5.6 \pm 0.4	50	125
110	RH 9.8*14*5.6	9.8 \pm 0.4	14.0 \pm 0.5	5.6 \pm 0.4	50	115
111	RH 9.8*15.5*4.3	9.8 \pm 0.4	15.5 \pm 0.5	4.3 \pm 0.4	75	160
112	RH 9.8*15.7*6.3	9.8 \pm 0.4	15.7 \pm 0.5	6.3 \pm 0.4	40	100
113	RH 9.8*17.5*6.35	9.8 \pm 0.4	17.5 \pm 0.5	6.35 \pm 0.4	50	100
114	RH 9.8*18*6.5	9.8 \pm 0.4	18.0 \pm 0.5	6.5 \pm 0.4	40	100
115	RH 9.8*19.05*6.35	9.8 \pm 0.4	19.05 \pm 0.5	6.35 \pm 0.4	50	105
116	RH 10*12*5.5	10.0 \pm 0.4	12.0 \pm 0.5	5.5 \pm 0.4	45	105
117	RH 10*14*6	10.0 \pm 0.4	14.0 \pm 0.5	6.0 \pm 0.4	40	100
118	RH 10*15.5*6.5	10.0 \pm 0.4	15.5 \pm 0.5	6.5 \pm 0.4	50	100
119	RH 10*17*6	10.0 \pm 0.4	17.0 \pm 0.5	6.0 \pm 0.4	50	120
120	RH 10*17.5*5	10.0 \pm 0.4	17.5 \pm 0.5	5.0 \pm 0.4	70	150
121	RH 10*20*4.3	10.0 \pm 0.4	20.0 \pm 0.5	4.3 \pm 0.4	70	180
122	RH 10*20*5	10.0 \pm 0.4	20.0 \pm 0.5	5.0 \pm 0.4	70	155
123	RH 10*20*5.5	10.0 \pm 0.4	20.0 \pm 0.5	5.5 \pm 0.4	65	135
124	RH 10*20*6	10.0 \pm 0.4	20.0 \pm 0.5	6.0 \pm 0.4	55	130
125	RH 10*20*6.35	10.0 \pm 0.4	20.0 \pm 0.5	6.35 \pm 0.4	50	105
126	RH 10*23.5*6.5	10.0 \pm 0.4	23.5 \pm 0.5	6.5 \pm 0.4	50	125
127	RH 10*25*5.5	10.0 \pm 0.4	25.0 \pm 0.5	5.5 \pm 0.4	75	165

EMI countermeasure for ferrite cores

◎ Detailed specifications and parameters are introduced

詳細規格及參數介紹

UNIT: mm

NO	SIZE CODE	A	B	C	Impedance(Ω) MIN	
					25 MHz	100 MHz
128	RH 10.4*10.4*5.8	10.4±0.4	10.4±0.5	5.8±0.4	40	95
129	RH 10.3*11.5*5	10.3±0.4	11.5±0.5	5.0±0.4	45	115
130	RH 10.5*12*5.5	10.5±0.4	12.0±0.5	5.5±0.4	45	105
131	RH 10.5*13.5*6.5	10.5±0.4	13.5±0.5	6.5±0.4	45	95
132	RH 10.5*14*6	10.5±0.4	14.0±0.5	6.0±0.4	50	115
133	RH 10.5*15*5.6	10.5±0.4	15.0±0.5	5.6±0.4	50	115
134	RH 10.5*15*7	10.5±0.4	15.0±0.5	7.0±0.4	35	100
135	RH 10.5*14*7.3	10.5±0.4	14.0±0.5	7.3±0.4	30	85
136	RH 10.5*20*5.5	10.5±0.4	20.0±0.5	5.5±0.4	75	150
137	RH 10.5*20*6	10.5±0.4	20.0±0.5	6.0±0.4	70	140
138	RH 10.5*20*6.5	10.5±0.4	20.0±0.5	6.5±0.4	60	120
139	RH 10.5*20*7	10.5±0.4	20.0±0.5	7.0±0.4	50	115
140	RH 10.5*20*7.3	10.5±0.4	20.0±0.5	7.3±0.4	45	105
141	RH 10.5*28.5*5.5	10.5±0.4	28.5±0.7	5.5±0.4	115	210
142	RH 10.5*30*6.5	10.5±0.4	30.5±0.5	6.5±0.4	80	175
143	RH 11*20*5	11.0±0.5	20.0±0.5	5.0±0.4	80	170
144	RH 11*20*7.5	11.0±0.5	20.0±0.5	7.5±0.4	50	110
145	RH 11.5*20*5	11.0±0.5	20.0±0.5	5.0±0.4	90	200
146	RH 11*25*5	11.0±0.5	25.0±0.6	5.0±0.4	95	210
147	RH 11.5*18.5*5	11.5±0.5	18.5±0.5	5.0±0.4	85	175
148	RH 11.5*25*5	11.5±0.5	25.0±0.6	5.0±0.4	100	240
149	RH 11.5*30*5	11.5±0.5	30.0±0.6	5.0±0.4	145	280
150	RH 11.8*15*7.3	11.8±0.5	15.0±0.5	7.3±0.4	40	100
151	RH 12*12.5*8.5	12.0±0.5	12.5±0.5	8.5±0.4	35	85
152	RH 12*12.7*6	12.0±0.5	12.7±0.5	6.0±0.4	50	120
153	RH 12*12.7*6.5	12.0±0.5	12.7±0.5	6.5±0.4	50	115
154	RH 12*13*8	12.0±0.5	13.0±0.5	8.0±0.4	35	95
155	RH 12*15*5.5	12.0±0.5	15.0±0.5	5.5±0.4	55	120

EMI countermeasure for ferrite cores

◎ Detailed specifications and parameters are introduced

詳細規格及參數介紹

UNIT: mm

NO	SIZE CODE	A	B	C	Impedance(Ω) MIN	
					25 MHz	100 MHz
156	RH 12*15.5*5.6	12.0±0.5	15.5±0.5	5.6±0.4	65	145
157	RH 12*15*7.3	12.0±0.5	15.0±0.5	7.3±0.4	45	105
158	RH 12.1*15.5*7.3	12.0±0.5	15.5±0.5	7.3±0.4	45	110
159	RH 12*16.5*6.5	12.0±0.5	16.5±0.5	6.5±0.4	55	130
160	RH 12*15*6.5	12.0±0.5	15.0±0.5	6.5±0.4	55	120
161	RH 12*15*8	12.0±0.5	15.0±0.5	8.0±0.4	40	95
162	RH 12*15*8.5	12.0±0.5	15.0±0.5	8.5±0.5	30	85
163	RH 12*17.5*6.5	12.0±0.5	17.5±0.6	6.5±0.4	65	140
164	RH 12*19*5.6	12.0±0.5	19.0±0.6	5.6±0.4	75	170
165	RH 12*20*3.5	12.0±0.5	20.0±0.6	3.5±0.4	120	265
166	RH 12*20*3.6	12.0±0.5	20.0±0.6	3.6±0.4	110	260
167	RH 12*20*4	12.0±0.5	20.0±0.6	4.0±0.4	120	225
168	RH 12*20*4.5	12.0±0.5	20.0±0.6	4.5±0.4	115	220
169	RH 12*20*5	12.0±0.5	20.0±0.6	5.0±0.4	85	180
170	RH 12*20*5.6	12.0±0.5	20.0±0.6	5.6±0.4	85	185
171	RH 12*20*6	12.0±0.5	20.0±0.6	6.0±0.4	65	145
172	RH 12*20*6.5	12.0±0.5	20.0±0.6	6.5±0.4	75	155
173	RH 12*20*7	12.0±0.5	20.0±0.6	7.0±0.4	55	130
174	RH 12*20*7.3	12.0±0.5	20.0±0.6	7.3±0.4	55	115
175	RH 12*20*8.5	12.0±0.5	20.0±0.6	8.5±0.4	45	110
176	RH 12*23*3.5	12.0±0.5	23.0±0.6	3.5±0.4	125	260
177	RH 12*23*4.5	12.0±0.5	23.0±0.6	4.5±0.4	120	250
178	RH 12*23*5.6	12.0±0.5	23.0±0.6	5.6±0.4	85	185
179	RH 12*23*6.5	12.0±0.5	23.0±0.6	6.5±0.4	70	170
180	RH 12*23*7.9	12.0±0.5	23.0±0.6	7.9±0.4	45	115
181	RH 12*24.5*5.6	12.0±0.5	24.5±0.6	5.6±0.4	95	190
182	RH 12*25*4	12.0±0.5	25.0±0.6	4.0±0.4	130	210
183	RH 12*25*5.6	12.0±0.5	25.0±0.6	5.6±0.4	125	210

EMI countermeasure for ferrite cores

◎ Detailed specifications and parameters are introduced

詳細規格及參數介紹

UNIT: mm

NO	SIZE CODE	A	B	C	Impedance(Ω) MIN	
					25 MHz	100 MHz
184	RH 12*25.4*5.2	12.0 \pm 0.5	25.4 \pm 0.6	5.2 \pm 0.4	95	205
185	RH 12*25*7.3	12.0 \pm 0.5	25.0 \pm 0.6	7.3 \pm 0.4	80	160
186	RH 12*26*7.3	12.0 \pm 0.5	26.0 \pm 0.7	7.3 \pm 0.4	75	170
187	RH 12*28.5*5.6	12.0 \pm 0.5	28.5 \pm 0.7	5.6 \pm 0.4	130	250
188	RH 12*28.5*6.5	12.0 \pm 0.5	28.5 \pm 0.7	6.5 \pm 0.4	90	185
189	RH 12*28.5*8	12.0 \pm 0.5	28.5 \pm 0.7	8.0 \pm 0.4	70	150
190	RH 12*29.7*5.6	12.0 \pm 0.5	29.7 \pm 0.7	5.6 \pm 0.4	110	225
191	RH 12*30*5	12.0 \pm 0.5	30.0 \pm 0.7	5.0 \pm 0.4	105	230
192	RH 12*30*5.6	12.0 \pm 0.5	30.0 \pm 0.7	5.6 \pm 0.4	125	250
193	RH 12*33*7.3	12.0 \pm 0.5	33.0 \pm 0.7	7.3 \pm 0.4	110	200
194	RH 12.2*27*7.9	12.2 \pm 0.5	27.0 \pm 0.7	7.9 \pm 0.4	70	150
195	RH 12.2*28.5*7.9	12.2 \pm 0.5	28.5 \pm 0.7	7.9 \pm 0.4	70	150
196	RH 12.3*12.5*5	12.3 \pm 0.5	12.5 \pm 0.5	5.0 \pm 0.4	70	145
197	RH 12.5*15*8	12.5 \pm 0.5	15.0 \pm 0.6	8.0 \pm 0.4	40	100
198	RH 12.5*20*8	12.5 \pm 0.5	20.0 \pm 0.6	8.0 \pm 0.4	50	120
199	RH 12.7*15*7.9	12.7 \pm 0.5	15.0 \pm 0.6	7.9 \pm 0.4	50	100
200	RH 12.7*16.7*7	12.7 \pm 0.5	16.7 \pm 0.6	7.0 \pm 0.4	50	120
201	RH 12.7*16.5*7.9	12.7 \pm 0.5	16.5 \pm 0.6	7.9 \pm 0.4	50	105
202	RH 12.7*18*8	12.7 \pm 0.5	18.0 \pm 0.6	8.0 \pm 0.4	55	120
203	RH 12.7*25.4*7.9	12.7 \pm 0.5	25.4 \pm 0.6	7.9 \pm 0.4	55	135
204	RH 12.8*15*8.4	12.8 \pm 0.5	15.0 \pm 0.5	8.4 \pm 0.4	40	100
205	RH 13*20*5	13.0 \pm 0.5	20.0 \pm 0.6	5.0 \pm 0.4	115	205
206	RH 13*28*8	13.0 \pm 0.5	28.0 \pm 0.7	8.0 \pm 0.4	65	155
207	RH 14*15*7	14.0 \pm 0.5	15.0 \pm 0.5	7.0 \pm 0.4	55	125
208	RH 14*15*9	14.0 \pm 0.5	15.0 \pm 0.6	9.0 \pm 0.5	40	100
209	RH 14*15*10	14.0 \pm 0.5	15.0 \pm 0.7	10.0 \pm 0.5	35	95
210	RH 14*16*10	14.0 \pm 0.5	16.0 \pm 0.5	10.0 \pm 0.5	35	95
211	RH 14*18*10	14.0 \pm 0.5	18.0 \pm 0.6	10.0 \pm 0.5	40	110

EMI countermeasure for ferrite cores

◎ Detailed specifications and parameters are introduced

詳細規格及參數介紹

UNIT: mm

NO	SIZE CODE	A	B	C	Impedance(Ω) MIN	
					25 MHz	100 MHz
212	RH 14*22*10	14.0 \pm 0.5	22.0 \pm 0.6	10.0 \pm 0.5	50	120
213	RH 14.2*15*5.5	14.2 \pm 0.5	15.0 \pm 0.5	5.5 \pm 0.4	65	145
214	RH 14.2*15*6.7	14.2 \pm 0.5	15.0 \pm 0.5	6.7 \pm 0.4	55	125
215	RH 14.2*15*7.2	14.2 \pm 0.5	15.0 \pm 0.5	7.2 \pm 0.4	50	120
216	RH 14.2*15*8	14.2 \pm 0.5	15.0 \pm 0.5	8.0 \pm 0.4	50	115
217	RH 14.2*15*9	14.2 \pm 0.5	15.0 \pm 0.5	9.0 \pm 0.5	45	100
218	RH 14.2*18*6.5	14.2 \pm 0.5	18.0 \pm 0.5	6.5 \pm 0.4	70	160
219	RH 14.2*20*4.5	14.2 \pm 0.5	20.0 \pm 0.5	4.5 \pm 0.4	110	240
220	RH 14.2*20*5.2	14.2 \pm 0.5	20.0 \pm 0.5	5.2 \pm 0.4	110	220
221	RH 14.2*20*6.35	14.2 \pm 0.5	20.0 \pm 0.5	6.35 \pm 0.4	95	195
222	RH 14.2*20*7.2	14.2 \pm 0.5	20.0 \pm 0.5	7.2 \pm 0.4	65	150
223	RH 14.2*22*7.5	14.2 \pm 0.5	22.0 \pm 0.6	7.5 \pm 0.4	75	150
224	RH 14.2*23.5*6.7	14.2 \pm 0.5	23.5 \pm 0.6	6.7 \pm 0.4	85	175
225	RH 14.2*23*7.5	14.2 \pm 0.5	23.0 \pm 0.6	7.5 \pm 0.4	80	180
226	RH 14.2*23.5*8	14.2 \pm 0.5	23.5 \pm 0.6	8.0 \pm 0.4	85	155
227	RH 14.2*24*9	14.2 \pm 0.5	24.0 \pm 0.6	9.0 \pm 0.5	55	145
228	RH 14*24*9.5	14.0 \pm 0.5	24.0 \pm 0.6	9.5 \pm 0.5	55	125
229	RH 14.2*25*7.5	14.2 \pm 0.5	25.0 \pm 0.6	7.5 \pm 0.4	110	185
230	RH 14.2*25*8	14.2 \pm 0.5	25.0 \pm 0.6	8.0 \pm 0.4	60	150
231	RH 14.2*25.5*9.5	14.2 \pm 0.5	25.5 \pm 0.6	9.5 \pm 0.5	65	130
232	RH 14.2*28.5*4.5	14.2 \pm 0.5	28.5 \pm 0.7	4.5 \pm 0.4	180	330
233	RH 14.2*28.5*5.5	14.2 \pm 0.5	28.5 \pm 0.7	5.5 \pm 0.4	150	285
234	RH 14.2*28.5*6.35	14.2 \pm 0.5	28.5 \pm 0.7	6.35 \pm 0.4	140	240
235	RH 14.2*28.5*7	14.2 \pm 0.5	28.5 \pm 0.7	7.0 \pm 0.4	105	230
236	RH 14.2*28.5*7.2	14.2 \pm 0.5	28.5 \pm 0.7	7.2 \pm 0.4	100	200
237	RH 14.2*28.5*8	14.2 \pm 0.5	28.5 \pm 0.7	8.0 \pm 0.4	90	190
238	RH 14.2*28.5*8.3	14.2 \pm 0.5	28.5 \pm 0.7	8.3 \pm 0.4	80	170
239	RH 14.2*28.5*9	14.2 \pm 0.5	28.5 \pm 0.7	9.0 \pm 0.5	75	155

EMI countermeasure for ferrite cores

◎ Detailed specifications and parameters are introduced

詳細規格及參數介紹

UNIT: mm

NO	SIZE CODE	A	B	C	Impedance(Ω) MIN	
					25 MHz	100 MHz
240	RH 14.2*28.5*9.5	14.2±0.5	28.5±0.7	9.5±0.5	70	145
241	RH 14.2*28.5*10	14.2±0.5	28.5±0.7	10.0±0.5	55	125
242	RH 14.2*30*8	14.2±0.5	30.0±0.7	8.0±0.4	75	175
243	RH 15.5*28.5*7.3	15.5±0.5	28.5±0.7	7.3±0.4	125	255
244	RH 15.7*27*9	15.7±0.5	27.0±0.7	9.0±0.5	90	185
245	RH 15.88*25.6*7.86	15.88±0.5	25.6±0.7	7.86±0.4	115	205
246	RH 16*17*8	16.0±0.5	17.0±0.5	8.0±0.4	65	145
247	RH 16*17*9	16.0±0.5	17.0±0.5	9.0±0.5	60	125
248	RH 16*17*10	16.0±0.5	17.0±0.5	10.0±0.5	40	105
249	RH 16*17.5*4.3	16.0±0.5	17.5±0.5	4.3±0.4	115	235
250	RH 16*20*8	16.0±0.5	20.0±0.5	8.0±0.4	85	165
251	RH 16*20*9	16.0±0.5	20.0±0.5	9.0±0.5	60	135
252	RH 16*25*9	16.0±0.5	25.0±0.6	9.0±0.5	80	165
253	RH 16*27*6.35	16.0±0.5	27.0±0.7	6.35±0.4	115	240
254	RH 16*28*7	16.0±0.5	28.0±0.7	7.0±0.4	105	220
255	RH 16*28*8	16.0±0.5	28.0±0.7	8.0±0.4	100	220
256	RH 16*28*9	16.0±0.5	28.5±0.7	9.0±0.5	80	190
257	RH 16*28*10	16.0±0.5	28.0±0.7	10.0±0.5	75	165
258	RH 16*28*10.7	16.0±0.5	28.0±0.7	10.7±0.5	65	130
259	RH 16*28.5*6.35	16.0±0.5	28.5±0.7	6.35±0.4	130	270
260	RH 16*28.5*7	16.0±0.5	28.5±0.7	7.0±0.4	110	225
261	RH 16*28.5*8	16.0±0.5	28.5±0.7	8.0±0.4	110	210
262	RH 16*28.5*9.5	16.0±0.5	28.5±0.7	9.5±0.5	90	170
263	RH 16*30*8	16.0±0.5	30.0±1.0	8.0±0.4	100	230
264	RH 16*33.3*8.2	16.0±0.5	33.3±1.0	8.2±0.4	125	250
265	RH 16.25*50.8*7.9	16.25±0.5	50.8±1.0	7.9±0.4	170	395
266	RH 17.07*25.4*8.76	17.07±0.5	25.4±0.6	8.76±0.4	105	200
267	RH 17.5*20*10	17.5±0.6	20.0±0.5	10.0±0.5	60	125

EMI countermeasure for ferrite cores

◎ Detailed specifications and parameters are introduced

詳細規格及參數介紹

UNIT: mm

NO	SIZE CODE	A	B	C	Impedance(Ω) MIN	
					25 MHz	100 MHz
268	RH 17.5*20*12.5	17.5 \pm 0.6	20.0 \pm 0.5	12.5 \pm 0.5	40	100
269	RH 17.5*23*12.7	17.5 \pm 0.6	23.0 \pm 0.6	12.7 \pm 0.5	40	110
270	RH 17.5*23.5*10	17.5 \pm 0.6	23.5 \pm 0.6	10.0 \pm 0.5	70	165
271	RH 17.5*24*10.5	17.5 \pm 0.6	24.0 \pm 0.6	10.5 \pm 0.5	75	150
272	RH 17.5*25*10.7	17.5 \pm 0.6	25.0 \pm 0.6	10.7 \pm 0.5	70	160
273	RH 17.5*25.5*8.7	17.5 \pm 0.6	25.5 \pm 0.6	8.7 \pm 0.4	100	200
274	RH 17.5*25.5*11.5	17.5 \pm 0.6	25.5 \pm 0.6	11.5 \pm 0.5	60	130
275	RH 17.5*26.5*9.5	17.5 \pm 0.6	26.5 \pm 0.7	9.5 \pm 0.5	85	185
276	RH 17.5*27*8	17.5 \pm 0.6	27.0 \pm 0.7	8.0 \pm 0.4	90	200
277	RH 17.5*27*9.5	17.5 \pm 0.6	27.0 \pm 0.7	9.5 \pm 0.5	80	170
278	RH 17.5*28.5*8.3	17.5 \pm 0.6	28.5 \pm 0.7	8.3 \pm 0.4	115	240
279	RH 17.5*28.5*9.5	17.5 \pm 0.6	28.5 \pm 0.7	9.5 \pm 0.5	110	205
280	RH 17.5*28.5*10	17.5 \pm 0.6	28.5 \pm 0.7	10.0 \pm 0.5	85	170
281	RH 17.5*28.5*10.5	17.5 \pm 0.6	28.5 \pm 0.7	10.5 \pm 0.5	75	165
282	RH 17.5*28.5*11.3	17.5 \pm 0.6	28.5 \pm 0.7	11.3 \pm 0.5	65	145
283	RH 17.5*28.5*11.7	17.5 \pm 0.6	28.5 \pm 0.7	11.7 \pm 0.5	65	145
284	RH 17.5*28.5*12	17.5 \pm 0.6	28.5 \pm 0.7	12.0 \pm 0.5	65	140
285	RH 17.5*28.5*12.5	17.5 \pm 0.6	28.5 \pm 0.7	12.5 \pm 0.5	55	125
286	RH 17.5*35*9.5	17.5 \pm 0.6	35.0 \pm 1.0	9.5 \pm 0.5	130	230
287	RH 18*28*10	18.0 \pm 0.6	28.0 \pm 0.7	10.0 \pm 0.5	100	195
288	RH 18*29*10	18.0 \pm 0.6	29.0 \pm 0.7	10.0 \pm 0.5	100	225
289	RH 18*36.3*9.4	18.0 \pm 0.6	36.3 \pm 1.0	9.4 \pm 0.5	105	240
290	RH 18.2*23.5*9.5	18.2 \pm 0.6	23.5 \pm 0.6	9.5 \pm 0.5	85	190
291	RH 18.2*25.5*11	18.2 \pm 0.6	25.5 \pm 0.6	11.0 \pm 0.5	75	155
292	RH 18.2*28.5*9.5	18.2 \pm 0.6	28.5 \pm 0.7	9.5 \pm 0.5	95	200
293	RH 18.4*20.5*12.5	18.4 \pm 0.6	20.5 \pm 0.6	12.5 \pm 0.5	45	110
294	RH 18.4*28.5*10.3	18.4 \pm 0.6	28.5 \pm 0.7	10.3 \pm 0.5	90	200
295	RH 18.4*28.5*11	18.4 \pm 0.6	28.5 \pm 0.7	11.0 \pm 0.5	75	60

EMI countermeasure for ferrite cores

◎ Detailed specifications and parameters are introduced

詳細規格及參數介紹

UNIT: mm

NO	SIZE CODE	A	B	C	Impedance(Ω) MIN	
					25 MHz	100 MHz
296	RH 19*28.5*12.7	19.0 \pm 0.6	28.5 \pm 0.7	12.7 \pm 0.5	65	130
297	RH 19*29*12	19.0 \pm 0.6	29.0 \pm 0.7	12.0 \pm 0.5	75	150
298	RH 19*29*13	19.0 \pm 0.6	29.0 \pm 0.7	13.0 \pm 0.5	60	130
299	RH 19*50.3*10	19.0 \pm 0.6	50.3 \pm 1.0	10.0 \pm 0.5	175	320
300	RH 20*30*8	20.0 \pm 0.6	30.0 \pm 1.0	8.0 \pm 0.4	135	285
301	RH 20.8*30*11.6	20.8 \pm 0.6	30.0 \pm 1.0	11.6 \pm 0.5	90	200
302	RH 21*37*9	21.0 \pm 0.6	37.0 \pm 1.0	9.0 \pm 0.5	165	310
303	RH 21*29*15	21.0 \pm 0.6	29.0 \pm 0.7	15.0 \pm 0.6	55	130
304	RH 22.5*25*13.5	22.5 \pm 0.6	25.0 \pm 0.6	13.5 \pm 0.5	75	150
305	RH 22.5*29*13.8	22.5 \pm 0.6	29.0 \pm 0.7	13.8 \pm 0.5	80	175
306	RH 25.9*26.5*12.9	25.9 \pm 0.7	26.5 \pm 0.7	12.9 \pm 0.5	105	215
307	RH 26*28*16	26.0 \pm 0.7	28.0 \pm 0.7	16.0 \pm 0.6	65	160
308	RH 26*28.5*13	26.0 \pm 0.7	28.5 \pm 0.7	13.0 \pm 0.5	115	225
309	RH 25.9*28.5*12.6	25.9 \pm 0.7	28.5 \pm 0.7	12.6 \pm 0.5	110	240
310	RH 25.9*29*12.7	25.9 \pm 0.7	29.0 \pm 1.0	12.7 \pm 0.5	115	230
311	RH 26*30*13	26.0 \pm 0.7	30.0 \pm 0.5	13.0 \pm 0.5	140	255
312	RH 27.5*28.5*13.5	27.5 \pm 0.7	28.5 \pm 0.7	13.5 \pm 0.5	105	210
313	RH 28*30*13.5	28.0 \pm 0.7	30.0 \pm 0.7	13.5 \pm 0.5	120	250